

Vehicle target area detection using image processing technique

P. Karthikeyan*, N. Mohamed Usman, S. Mohanraj, Shubham singh

Dept. of Computer Science and Engineering, Vel Tech High Tech Dr. Rangarajan Dr. Sakunthala Engineering College, Anna University, Chennai, India.

*Corresponding author: E-Mail: karthikeyan@velhightech.com

ABSTRACT

Target taking after is a basic essential in the battle zone. The proposed target portrayal count is a video based surveillance structure. This kind of structure is amazingly useful in taking after and gathering of targets. The target zone and tire acknowledgment are the key steps of this figuring used for distinguishing proof of target. A target portrayal count in perspective of locale and tire turn scattering was figured and sent in an introduced structure for field testing. The trial relative results are given as tables. To crush the obstructions of standard strategies here target zone and tires are controlled by using picture planning in MATLAB. The figuring needs to perceive genuine classes i.e. bicycles, four wheelers and considerable vehicles (e.g. Tanks). The target getting recordings recorded by day camera and a mid-night by warm camera can be used. The rate of error of the proposed technique are showed up and discussed with examination.

KEY WORDS: Vehicle discovery, Classification, Background subtraction, Surveillance, Feature Extraction.

1. INTRODUCTION

Surveillance frameworks for Defense applications. This target surveillance system gives information about different target parameters, for example, number of targets, target highlights based characterization and so forth. As the single greatest reason for wrong hitting of target isn't right grouping, a large portion of the ebb and flow research is centered around order of the correct focus with parametric qualities. Many target grouping (Yung, 2001; Burden, 1997; Gupte, 2000) frameworks in light of various procedures are on pipe line to come. The objective observation frameworks is absolutely reliant on different systems of picture handling. The continuous recordings are utilized for to track the moving items, removing directions, discovering target force or evaluating target speed and so forth. The ongoing video recording gives data about extra elements of the objective. This sort of created framework be valuable for the ongoing reconnaissance capacity upgrade. It can be appropriate in military applications as well as in nonmilitary personnel applications. The radar based framework is additionally well known in target observation application. The proposed framework is contrasted less in cost as contrasted and radar based framework anyway it requires periodical support.

The proposed calculation depends on foundation subtraction. In foundation subtraction is only particular foundation demonstrating. There are numerous different procedures created for moving target discovery. At first this strategy extricates the foundation from video, then it forms it by applying channels, after that the video is again prepared to get the elements of the objective. At long last it can recognize various parametric elements like the separation between tires, sweep of tires, speed of target and target zone and so forth. These parameters characterize the objective as indicated by the preparation set.

Problem Description: The proposed strategy is utilized for assessing the objective speed what's more, characterize the target according to territory and separation between the tires, while it is followed by camera. The movement of target is controlled by change in stable casing. The proposed framework has numerous operations talked about further. Firstly, the edges are removed from video, then foundation demonstrating utilized for discovery of movement. Averaging all edges, foundation without moving article is extricated and after that it is subtracted from the video to get foundation separated video

2. METHODS & MATERIALS

Algorithm Design, Description & Implementation: The recorded recordings as an info is processed (Lai, 2000) in MATLAB 2013 stage. The MATLAB stage is utilized to build up the different codes for arrangement. A programming dialect utilized for acknowledgment is produced by Math Works, MATLAB having many components like lattice controls, plotting of capacities and information, usage of calculations, creation GUI (Graphical User Interface).

The conditions that are accepted while building up the calculation are the accompanying:

- The input video is shot from a static camera, static foundation that is essential for question division by created calculation.
- Classify the items prepared for a specific range.
- The input video document must be of video (.avi) organize.

The improvement of calculation covers all the hypothetical parts of picture handling required for comprehension the means followed in video preparing. Beginning with foundation subtraction, it covers the essentials of morphological operations and blob location. The info video is handled by the accompanying calculations step shrewd stride to get arranged:-

- **Pre-handling:** This calculation takes a shot at grayscale pictures. Subsequently the initial step is changing over rgb picture into dark scale called pre-handling.
- **Background demonstrating:** The foundation extraction is called displaying of foundation; for foundation extraction from static foundation (Yannick Benezeth, 2010) the mean of few quantities of edges of the video have been taken.
- **Object Segmentation:** The protest division is done by executing foundation subtraction. The foundation assessed from above stride is subtracted from every casing of the video and the resultant picture is changed over into a twofold picture in which the question shows up Fig.1, demonstrates the stream diagram of the approach.

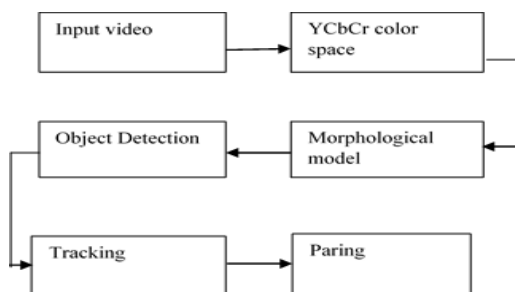


Figure.1. Flow chart of proposed algorithm

Detailed Description of operations:

Input Video Signal: The video is recorded by utilizing portable or any camera. In pre-preparing the video is changed over into the edges by picture handling methods (Lai, 1998). The different parameters, for example, number of edges, casing rate, shading organization and casing size are separated. The edge size is of 1920x1080 pixels.

YCbCr Color space: YCbCr, is a group of shading spaces utilized as a part of the shading picture pipeline in video and computerized photography frameworks. Y' is the luma segment and CB and CR are the blue-contrast and red-distinction chroma parts.

Y' (with prime) is recognized from Y, which is luminance, implying that light force is nonlinearly encoded in view of gamma adjusted RGB primaries.

Y'CbCr shading spaces are characterized by a scientific facilitate change from a related RGB shading space. In the event that the hidden RGB shading space is total, the Y'CbCr shading space is a flat out shading space too; on the other hand, if the RGB space is not well characterized, so is Y'CbCr.

Morphological model: Morphological analysis, on the other hand, does not drop any of the components from the system itself, but works backwards from the output towards the system internals. (Yung, 2001) Again, the interactions and relations get to play their parts in MA and their effects are accounted for in the analysis.-

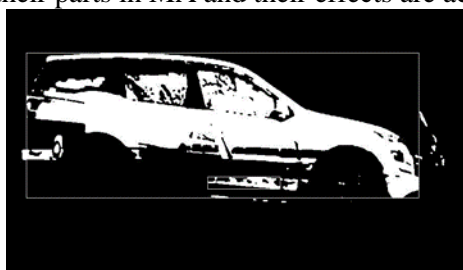


Figure.2. Blog analysis done to calculate specific area

Tracking and Paring: After the lights detection we have to find the similarity between the headlights. The first step in light detection process is to extract bright blobs from ROIs to facilitate SVM classifier-based detector. Blobs with high intensity are extracted by threshold the luminance and then looking for connected regions.

Some post processing by morphological operations is performed to remove noises and achieve nontrivial segmentation.

The goal of this step is to get all possible headlight candidates and to miss headlights as few as possible. Unfortunately, some false alarms are inevitably involved in. The second step in headlight detection process is to classify the extracted bright blobs as headlights or not.

Since the classifier is applied to vehicle candidates rather than scans the whole image, it is very efficient. Finally pairing the headlights by the velocity.

Classification of Target: The objective is grouped on the premise of highlight extraction i.e. the region, speed and separation between tires, as per the above expressed calculation. After that it will be characterized on the premise of depicted parameters with the accompanying indicated impediments:

Area of dark or dull shaded vehicle is identified with blunder since when we change over it to high contrast picture then we will get the vehicle in dark shading,

- This makes an issue for the blob investigation since it checks the associated white pixels. To decrease this blunder we consider the extra component of tire recognition.
- Similarly when tire recognition alone is not fit to characterize the objective, consider the objective territory in parallel to group without blunder.
- Back feels worn out on bikes like engine cycles or bikes are secured. In this way, the calculation is not ready to distinguish the tires and henceforth arrangement is done on the premise of zone as it were.
- The preparing information in Table1 got by putting a camera at a settled separation from the objective is utilized to create recorded preparing set for constant framework.



Figure 3. black and white image or binary image




Figure 4. blob image of binary image

3. RESULT ANALYSIS

The Existing algorithm is based on background subtraction. In background subtraction is nothing but specific background modeling. There are many other techniques developed for moving target detection. Initially this technique extracts the background from video, then it processes it by applying filters, after that the video is again processed to get the features of the target. Finally it is able to detect a number of parametric features like the distance between tires, radius of tyres, speed of target and target area etc.

These parameters classify the target according to the training set.

- Area of black or dark colored vehicle is detected with error because when we convert it to black and white image then we will get the vehicle in black colour, this creates a problem for the blob analysis because it checks the connected white pixels. To reduce this error we consider the add-on feature of tyre detection.
- Similarly when tyre detection alone is not capable to classify the target, consider the target area in parallel to classify without error.

4. CONSLUSION

The proposed calculation has been produced for Speed investigation and Classification of Target on the premise of tires and range. The accompanying conclusions are made for the proposed calculation on the premise of result investigation:

- High determination camera must be utilized to take the recordings for handling keeping in mind the end goal to accomplish more precise outcomes in order.
- The proposed calculation can be executed progressively. The setup ought to be interfaced legitimately with precise prepared information.
- The camera must be set in static position to give the first scope of followed target utilized for further count.

It is inferred that the proposed calculation can be executed for target following framework in Surveillance Systems utilized for surface focuses .There is still much extension for future research in this field and any examination proposition for its improvement is sympathetically welcomed.

Future Work: In proposed procedure we are utilizing to recognize the vehicle front lamp utilizing YCbCr shading space are utilized to concentrate headlights. By grouping method to affirm the blob whether its blob are most certainly not. Machine-learning-based techniques have great segregation and better versatility. Here we are utilizing SVM arrangement to characterize the vehicles headlights from the identified blob to combine and following

REFERENCES

- Anita singh, Rajesh Kumar, Tripathi R.P, Utkarsh Arya, Vehicle Target Area and Tyre Detection Image Processing Technique, IEEE 6th International Conference on Advanced Computing, 2016.
- Burden M.J.J, Bell M.G.H, Vehicle classification using stereo vision, Proc. Sixth Intemational Conference on Image Processing and Its Applications, 2, 1997, 881-885.
- Fung G.S.K, Yung N.H.C, Pang G.K.H, Lai A.H.S, Effective moving cast shadow detection for monocular color image sequences, Research report, ITS-2000G02, Laboratory for ITS Research, The University of Hong Kong, 2000.
- Gleb Tcheslavski V, Morphological Image Processing, Basic Concepts, Springer, 2009.
- Gonzales R.C & Woods R.E, Digital Image Processing, 2-nd Edition, Prentice Hall, 2002

Gupte S, Masoud O, Papanikolopoulos N.P, Vision-based vehicle classification, Proc. Intelligent Transportation Systems, 2000, 46-51

Lai A.H.S, Yung N.H.C, A fast and accurate scoreboard algorithm for estimating stationary backgrounds in an image sequence, Proc. IEEE International Symposium on Circuits and Systems, ISCAS , 4, 1998, 241-244.

Lai A.H.S, Yung N.H.C, Vehicle-type identification through automated virtual loop assignment and block-based direction-biased motion estimation, IEEE Trans. Intelligent Transportation Systems, 1 (2), 2000, 86-97.

Yannick Benezeth, Pierre-Marc Jodoin, Bruno Emile, Helene Laurent, Christophe Rosenberger, Comparative study of background subtraction algorithms, Journal of Electronic Imaging, Society of Photo-optical Instrumentation Engineers, SPIE, 2010.

Yung N.H.C, Pang G.K.H, Fung G.S.K, A novel camera calibration technique for visual traffic surveillance, Proc. 7th World Congress on Intelligent Transport Systems, 2001, 3024.